


PACKAGE CONTENTS

HIGH PERFORMANCE DATA.
FLYSIGHT

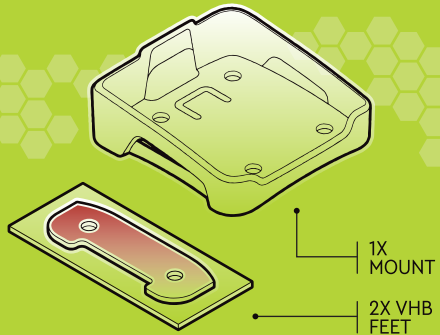


The package also contains hardware for mounting using screws. The procedure for mounting using screws is discussed on the website www.fly sight.ca

1



BEFORE INSTALLATION


First, clean and dry the surface where the mount will be installed as well as the bottom of the mount itself.

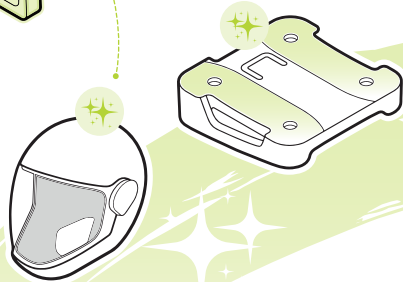

FLYSIGHT

TO INSTALL THE MOUNT


Remove the VHB feet from their backing and install on the bottom of the mount.



2


Remove the red plastic tape from both VHB feet.

3

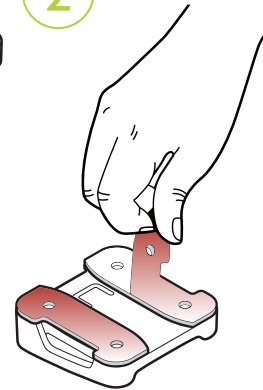

4

Install the mount on your helmet.

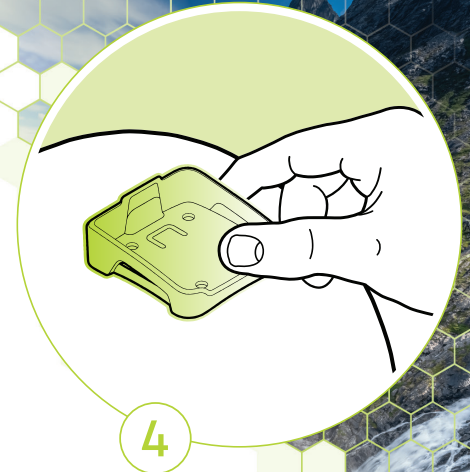



HIGH PERFORMANCE DATA.
FLYSIGHT

TO INSTALL THE
FLYSIGHT
IN THE MOUNT



To install the FlySight in the mount, first align the posts at the front of the mount with the recesses in the FlySight, then rotate the back of the mount down into place.



Push the mount into place until you hear a click. Check that the FlySight is installed securely in the mount.



To remove the FlySight from the mount, using either your thumb or the supplied tool, push the tab on the mount away from the FlySight until the FlySight is released from the mount.



FLYSIGHT
MOUNT GUIDE